

# CT51XP & CT71XP

2 MACHINES, 8 HEADS, INFINITE POSSIBILITIES



When you purchase one scrubber of either the **CT51** or **CT71** you have access to infinite applications. With the interchangeable heads, your XP walk-behind scrubber can become a standard disc scrubber, a cylindrical scrubber, an orbital scrubber or a high speed scrubber, all depending on your specific needs.



## CT51/ CT71 XP DISC 20", 24" and 28"

The CT51 and CT71 XP is a standard disc scrubber. It can be used to clean areas faster (up to 16x faster than mopping the floor) and can dry immediately to prevent slips and falls.



## NEW CT51/ CT71 XP CYLINDRICAL 21"

The cylindrical version of the CT51 and CT71 can make your cleaning jobs significantly faster as the scrubber works as a sweeper as well, picking up light debris while simultaneously cleaning the floor. These are ideal for cleaning in areas with lots of debris such as woodchips, sawdust or metal and glass.

## NEW CT51/ CT71 XP ORBITAL 20"



Orbital head for deep grout cleaning and the removal of floor finish without chemicals. There is a 75% labor reduction with the head's 2300 rpm micro-orbital movement and an 80% to 90% reduction in costs without the use of chemicals.

The orbital head comes in a rectangular shape which allows it to reach into difficult spaces, such as corner and edges.

## CT51/ CT71 XP HIGH SPEED 20" and 28"



IPC Eagle's HST™ high speed automatic scrubbers are uniquely designed to clean and polish floors in just one process. This chemical-free mechanical cleaning approach physically removes the soil as it polishes the surface, drastically cutting the cost of labor and chemicals while eliminating frequent burnishing.

# APPLICATIONS

## NEW CYLINDRICAL SCRUBBERS

### CT51XP55R/ CT71XP55R

- Areas with great amounts of debris, such as
  - Warehouses
  - Work sites
  - Food and beverage processing
  - Manufacturing facilities
  - Garages
  - Industrial plants
- Floors with grout lines, such as:
  - Locker rooms
  - Schools
  - Restaurants
  - Large restrooms
  - Healthcare facilities

## NEW ORBITAL SCRUBBERS


### CT51ORB50/ CT71ORB50

- Sealed floors
- Rooms with tight corners or clearly defined cut lines
- Floors that require stripping, such as:
  - Retail
  - Restaurants
  - Healthcare
  - Schools
  - Gym floors
- Grouted and porous floors
- Concrete and stone polishing



## GET RIGHT SIZED

|               | Description        | Continuous Run-Time | Theoretical ft <sup>2</sup> / h | Maximum Theoretical ft <sup>2</sup> / h | Ft <sup>2</sup> / Charge Efficiency (70%) |
|---------------|--------------------|---------------------|---------------------------------|---|---|
| CT51XP50 (HS) | 145ah Acid Battery | 2.0                 | 16,811                          | 38,555                                  | 26,988                                    |
| CT51XP50 (HS) | 155ah Acid Battery | 3.0                 | 16,811                          | 57,832                                  | 40,482                                    |
| CT51XP50 (HS) | 100 ah AGM Battery | 2.0                 | 16,811                          | 38,555                                  | 26,899                                    |
| CT51XP50 (HS) | 115 ah AGM Battery | 2.1                 | 16,811                          | 40,482                                  | 28,338                                    |
| CT51XP50 (HS) | 140 ah AGM Battery | 3.1                 | 16,811                          | 59,760                                  | 41,832                                    |
| CT71XP50 (HS) | 145ah Acid Battery | 2.0                 | 16,811                          | 38,555                                  | 26,988                                    |
| CT71XP50 (HS) | 155ah Acid Battery | 3.0                 | 16,811                          | 57,832                                  | 40,482                                    |
| CT71XP50 (HS) | 100 ah AGM Battery | 2.0                 | 16,811                          | 38,555                                  | 26,899                                    |
| CT71XP50 (HS) | 115 ah AGM Battery | 2.1                 | 16,811                          | 40,482                                  | 28,338                                    |
| CT71XP50 (HS) | 140 ah AGM Battery | 3.1                 | 16,811                          | 59,760                                  | 41,832                                    |
| CT51XP55R     | 145ah Acid Battery | 2.0                 | 20,723                          | 41,446                                  | 29,012                                    |
| CT51XP55R     | 155ah Acid Battery | 3.0                 | 20,723                          | 62,170                                  | 43,519                                    |
| CT51XP55R     | 100 ah AGM Battery | 2.0                 | 20,723                          | 41,446                                  | 29,012                                    |
| CT51XP55R     | 115 ah AGM Battery | 2.1                 | 20,723                          | 43,519                                  | 30,463                                    |
| CT51XP55R     | 140 ah AGM Battery | 3.1                 | 20,723                          | 64,242                                  | 44,969                                    |
| CT71XP55R     | 145ah Acid Battery | 2.0                 | 20,723                          | 41,446                                  | 29,012                                    |
| CT71XP55R     | 155ah Acid Battery | 3.0                 | 20,723                          | 62,170                                  | 43,519                                    |
| CT71XP55R     | 100 ah AGM Battery | 2.0                 | 20,723                          | 41,446                                  | 29,012                                    |
| CT71XP55R     | 115 ah AGM Battery | 2.1                 | 20,723                          | 43,519                                  | 30,463                                    |
| CT71XP55R     | 140 ah AGM Battery | 3.1                 | 20,723                          | 64,242                                  | 44,969                                    |
| CT51ORB50     | 145ah Acid Battery | 2.0                 | 16,811                          | 38,555                                  | 26,988                                    |
| CT51ORB50     | 155ah Acid Battery | 3.0                 | 16,811                          | 57,832                                  | 40,482                                    |
| CT51ORB50     | 100 ah AGM Battery | 2.0                 | 16,811                          | 38,555                                  | 26,899                                    |
| CT51ORB50     | 115 ah AGM Battery | 2.1                 | 16,811                          | 40,482                                  | 28,338                                    |
| CT51ORB50     | 140 ah AGM Battery | 3.1                 | 16,811                          | 59,760                                  | 41,332                                    |
| CT71ORB50     | 145ah Acid Battery | 2.0                 | 16,811                          | 38,555                                  | 26,988                                    |
| CT71ORB50     | 155ah Acid Battery | 3.0                 | 16,811                          | 57,832                                  | 40,482                                    |
| CT71ORB50     | 100 ah AGM Battery | 2.0                 | 16,811                          | 38,555                                  | 26,899                                    |
| CT71ORB50     | 115 ah AGM Battery | 2.1                 | 16,811                          | 40,482                                  | 28,338                                    |
| CT71ORB50     | 140 ah AGM Battery | 3.1                 | 16,811                          | 59,760                                  | 41,332                                    |

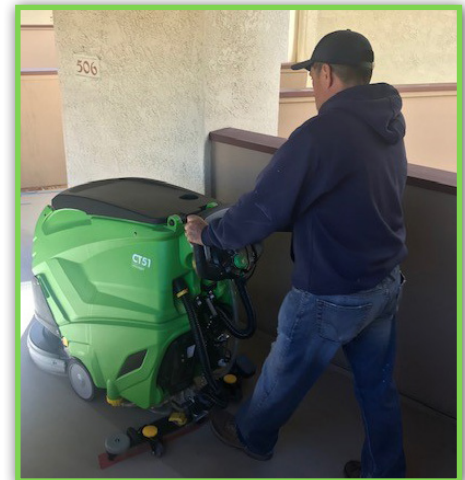

## CT51 & CT71 XP SPECIFICATIONS



CT51XP50/  
CT51XP50HS



CT51XP70/  
CT51XP70HS



CT71XP50/  
CT71XP50HS



CT71XP70/  
CT71XP70HS

|   |  |   |   |   |   |
|---|--|---|---|---|---|
| Max theoretical productivity            | ft <sup>2</sup> /h - m <sup>2</sup> /h | 19,000 ft <sup>2</sup> / 1,570 m <sup>2</sup> | 27,000 ft <sup>2</sup> / 2,510 m <sup>2</sup> | 19,000 ft <sup>2</sup> / 1,570 m <sup>2</sup> | 27,000 ft <sup>2</sup> / 2,510 m <sup>2</sup> |
| Cleaning path                           | in / mm                                | 20" / 500 mm                                  | 28" / 700 mm                                  | 20" / 500 mm                                  | 28" / 700 mm                                  |
| Water tank capacity (solution recovery) | gal/ l                                 | 13/14 gal - 51/53 l                           | 13/14 gal - 51/53 l                           | 19/20 gal - 71/73 l                           | 19/20 gal - 71/73 l                           |
| Max running time                        | min                                    | 210   | 210   | 210   | 210   |
| Voltage                                 | V                                      | 24 (2x12)                                     | 24 (2x12)                                     | 24 (2x12)                                     | 24 (2x12)                                     |
| Installed power                         | W                                      | 1550  | 1550  | 1550  | 1550  |
| Noise Level                             | DB                                     | 58 dB   | 58 dB   | 58 dB   | 58 dB   |
| Squeegee width                          | In/ mm                                 | 32 in/ 815 mm                                 | 33 in/ 840 mm                                 | 32 in/ 815 mm                                 | 33 in/ 840 mm                                 |
| Max speed                               | Mph/ kph                               | 2.2 mph/ 3.5 kph                              | 2.2 mph/ 3.5 kph                              | 2.2 mph/ 3.5 kph                              | 2.2 mph/ 3.5 kph                              |
| Weight (w/o batteries)                  | Lbs/ kg                                | 200 lbs/ 90.5 kg                              | 217 lbs/ 97.5 kg                              | 200 lbs/ 90.5 kg                              | 1215 lbs/ 97.3 kg                             |
| Dimensions (l x w x h)                  | in                                     | 54 x 22 x 41 in                               | 54 x 29 x 41 in                               | 54 x 22 x 41 in                               | 54 x 29 x 41 in                               |



CT51ORB50



CT51XP55R



CT71ORB50



CT71XP55R

|   |  |   |   |   |   |
|---|--|---|---|---|---|
| Max theoretical productivity            | ft <sup>2</sup> /h - m <sup>2</sup> /h | 19,000 ft <sup>2</sup> / 1,570 m <sup>2</sup> | 20,000 ft <sup>2</sup> / 1,860 m <sup>2</sup> | 19,000 ft <sup>2</sup> / 1,570 m <sup>2</sup> | 20,000 ft <sup>2</sup> / 1,860 m <sup>2</sup> |
| Cleaning path                           | in / mm                                | 20" / 500 mm                                  | 21" / 550 mm                                  | 20" / 500 mm                                  | 21" / 550 mm                                  |
| Water tank capacity (solution recovery) | gal/ l                                 | 13/14 gal - 51/53 l                           | 13/14 gal - 51/53 l                           | 19/20 gal - 71/73 l                           | 19/20 gal - 71/73 l                           |
| Max running time                        | min                                    | 210   | 210   | 210   | 210   |
| Voltage                                 | V                                      | 24 (2x12)                                     | 24 (2x12)                                     | 24 (2x12)                                     | 24 (2x12)                                     |
| Installed power                         | W                                      | 1030  | 1550  | 1550  | 1030  |
| Noise Level                             | DB                                     | 58 dB   | 58 dB   | 58 dB   | 58 dB   |
| Squeegee width                          | In/ mm                                 | 32 in/ 815 mm                                 | 32 in/ 815 mm                                 | 32 in/ 815 mm                                 | 32 in/ 815 mm                                 |
| Max speed                               | Mph/ kph                               | 2.2 mph/ 3.5 kph                              | 2.2 mph/ 3.5 kph                              | 2.2 mph/ 3.5 kph                              | 2.2 mph/ 3.5 kph                              |
| Weight (w/o batteries)                  | Lbs/ kg                                | 200 lbs/ 90.5 kg                              | 203 lbs/ 92 kg                                | 200 lbs/ 90.5 kg                              | 203 lbs/ 92 kg                                |
| Dimensions (l x w x h)                  | in                                     | 54 x 22 x 41 in                               | 54 x 29 x 41 in                               | 54 x 22 x 41 in                               | 54 x 29 x 41 in                               |

Kentucky Cleaning Solutions, LLC, DBA

**BLUEGRASS** 

**JAN/SAN & PAPER SUPPLIES**

624 Comanche Trail, Frankfort, KY 40601

[www.BluegrassJanitorial.com](http://www.BluegrassJanitorial.com)

502-382-8320