



Kentucky Cleaning Solutions, LLC, DBA
BLUEGRASS 

JAN/SAN & PAPER SUPPLIES

624 Comanche Trail, Frankfort, KY 40601
www.BluegrassJanitorial.com
502-382-8320

PROPANE

Eagle
by DITEQ

DITEQ Eagle Propane Powered Equipment

For the Floor Prep, Polish, and Care Industry



Tracker 3000 18HP FS481V

30" P/N: 300124



The Tracker 3000 offers a highly versatile low profile stripping/ deep scrubbing in a 30" path with two 16" counter rotating brushes. This allows removal of multiple layers of floor finish easily. The high performance propane engine provides optimum performance on any floor surface and under any obstacle.

FEATURES

- Tracker gear-driven two 16" brushes
- ProCarb™ carburetor & E-Zero™ emissions shutdown
- Exceeds EPA & CARB standards
- Engine kill switch
- Electric start
- Easy starting with a manual carb choke
- Standard centrifugal clutch
- Optional solution tank kit available P/N: 300217

TECH SPECS

- Production: 20,000 ft² / 1,900 m² per hour
- Engine Speed: 3,000 rpm
- Head Pressure: 350 lb / 158 kg
- Pad Speed: 320 rpm
- Pad Size: 16" / 0.76 m
- Total Weight: 480 lb / 218 kg



18 HP Kawasaki FS481V Engine
Propane Modified

Manual Choke & Electric Start



Brush Included



Optional Pad Driver



Pride 2100 18HP FS481V

21" P/N: 300268



EZ Start
Hot Or Cold



The Pride 2100 strip/buffer, offers two pieces of equipment in one. By simply changing one belt, this amazing floor care machine can buff at 2100 rpms or strip at 500-700 rpms. A 360° floating, swivel, spin-on pad driver makes for easy maintenance. Run time is 5 to 6 hours per propane tank. Emissions protected by three-way catalytic muffler on Kawasaki Engine.

FEATURES

- ProCarb™ carburetor & E-Zero™ emissions shutdown
- Exceeds EPA & CARB standards
- Comes with stip brush, combo burnish pad, splash guard, belt tensioner tool, 360° floating swivel spin-on pad driver
- Engine kill switch
- Electric start
- Easy starting with a manual carb choke
- Standard centrifugal clutch
- Optional solution tank kit available P/N: 300217

TECH SPECS

- Production: 25,000 ft² / 2,320 m² per hour
- Engine Speed: 3,400 rpm
- Pad Speed – Buff: 2,100 rpm; Strip: 500-700 rpm
- Total Weight: 195 lb / 88 kg

18 HP Kawasaki FS481V Engine
Propane Modified



Manual Choke & Electric Start



Pride 2100 with Optional
Water Tank Assembly P/N: 300217

Brush Included




Pad Driver Included



Contractor Series 18HP FS481V

21" P/N: 300234
27" P/N: 300236

Eagle Brand Contractor Series buffers provide a very safe and economical solution for all floor surfaces and facilities, including businesses, schools and universities. The Contractor Series features proprietary E-Zero™ Emissions Shutdown system, the ProCarb™ carburetor system, and an engine kill switch. Decks are constructed with a durable aluminum cast deck and high quality components for long lasting performance and easy maintenance. The Contractor Series buffers come in two sizes including 21" and 27" decks.

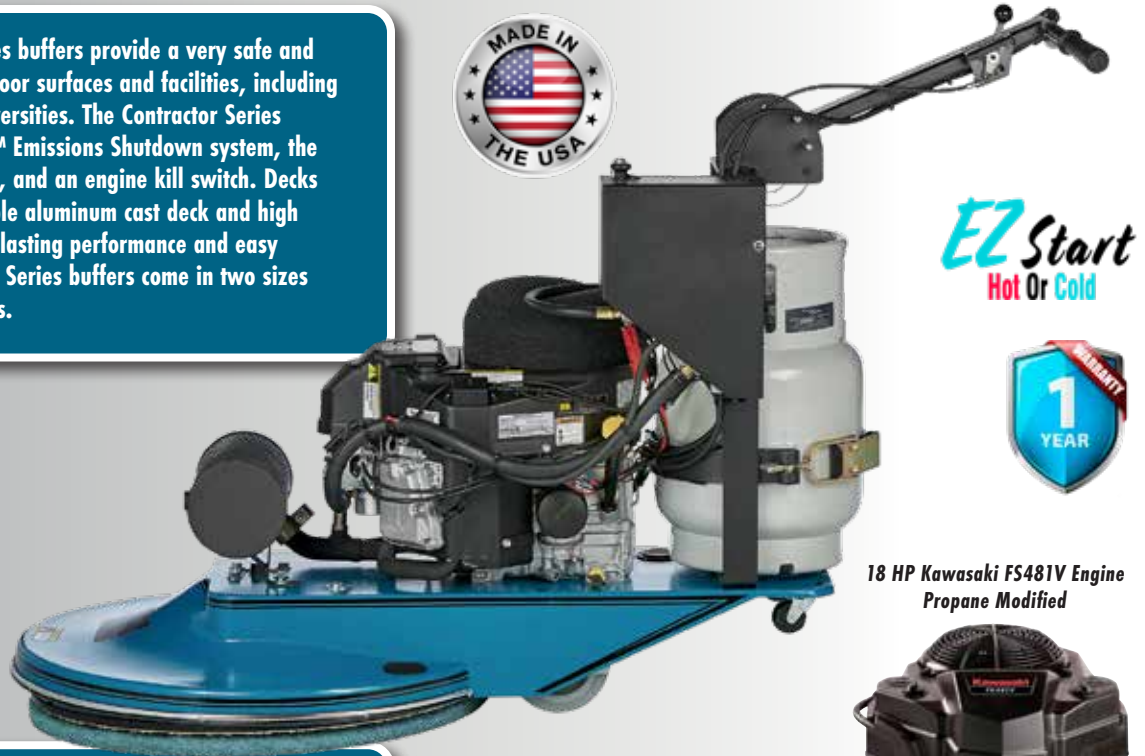

EZ Start
Hot Or Cold



18 HP Kawasaki FS481V Engine
Propane Modified



FEATURES

- Heavy duty construction
- Very economical buffing and burnishing solution
- ProCarb™ carburetor & E-Zero™ emissions shutdown
- Exceeds EPA & CARB standards
- Engine kill switch
- Manual choke
- Electric start
- Standard pad driver included
- Optional electric clutch P/N: 300141

TECH SPECS

- Production: 25,000 ft² / 2,320 m² per hour
- Engine Speed: 3,600 rpm maximum
- Pad Speed: 1,800 rpm
- Kawasaki 18HP FS481V Engine Propane modified
- Total Weight 21": 200 lb / 91 kg
- Total Weight 27": 250 lb / 113 kg

Operator Controls



Adjustable height handle



Manual Choke & Electric Start



Passive Dust Control 18HP FS481V

27" P/N: 300126

Eagle Brand Dust Control Series buffers offer versatility for both janitorial and concrete grinding applications. The Dust Control Series offers two solutions to actively control and collect dust in high dust environments. The Dust Control, ideal for use across concrete and other environments, actively captures 85% of dust particles inside the dust shroud and skirt into a reusable dust filter bag. This unit also comes equipped with a 2" port to attach an external vacuum system for heavier dust environments. The Dust Control Series buffer is constructed with a very durable aluminum cast deck and high quality components for long lasting performance and easy maintenance.

FEATURES

- Passive dust collection system
- Vacuum bag and external vacuum port
- ProCarb™ carburetor & E-Zero™ emissions shutdown
- Exceeds EPA & CARB standards
- Engine kill switch
- Standard pad driver included
- Optional electric clutch P/N: 300141

TECH SPECS

- Production: 30-35,000 ft² / 3,000-3,250 m² per hour
- Engine Speed: 3,600 rpm maximum
- Pad Speed: 1,800 rpm
- Pad Size: 27" / 0.7 m
- Kawasaki 18HP FS481V Engine Propane modified
- Total Weight: 275 lb / 125 kg



EZ Start
Hot Or Cold



Passive Dust Control
Reusable Dust Filter Bag

Manual Choke & Electric Start



Adjustable height handle



18 HP Kawasaki FS481V Engine
Propane Modified



EnviroPro Series 18HP FS481V

27" P/N: 300116

The EnviroPro Series Burnisher is ideal for achieving optimum shine on concrete and other surfaces using black or diamond impregnated pads. The weighted EnviroPro increases floor temperature during burnishing to raise the gloss level. Increased floor temperature during burnishing allows the EnviroPro to achieve optimum shine and gloss. The EnviroPro's passive dust collection system traps and filters dust through a unique shroud design. This dust collection system also comes equipped with a 2" external vacuum port for heavier dust collection.

The EnviroPro Series comes in the 27" deck with a Kawasaki engine and with a 15 lb deck weight.

FEATURES

- Weighted flat metal pad driver
- Weighted deck for additional head pressure
- Dust collection system
- ProCarb™ carburetor & E-Zero™ emissions shutdown
- Exceeds EPA & CARB standards
- Engine kill switch
- Manual choke
- Steel propane tank included
- Full pad surface contact area
- Weighted pad driver included
- Optional electric clutch P/N: 300141

TECH SPECS

- Production: 33,000 ft² / 3,065 m² per hour
- Engine Speed: 3,600 rpm maximum
- Pad Speed: 1,800 rpm
- Kawasaki 18HP FS481V Engine Propane modified
- Total Weight: 285 lb / 129 kg



15 lb deck weight

Optional Aluminum Propane Tank P/N: 680053

Manual Choke & Electric Start



Dust Control with Vacuum 18HP FS481V

27" P/N: 700112

The Dust Control Series with Onboard 70 CFM filtered dust vacuum reduces dust to a minimum during burnishing operations. The air filter captures dust and protects 12 V DC vacuum motor while the dust collection box offers easy-to-open, empty and clean design. New improved dust skirt seals against floor for better passive and active dust collection.

FEATURES

- Dust collection system 12 V 3-stage vacuum motor
- ProCarb™ carburetor & E-Zero™ emissions shutdown
- Exceeds EPA & CARB standards
- Engine kill switch
- Manual Choke
- Standard pad driver included
- Steel propane tank included
- Optional electric clutch P/N: 300141

TECH SPECS

- Productivity: 30,000-35,000 ft² per hour
- Productivity: 2,800-3,250 m² per hour
- Vacuum Motor: 12 V 3-stage
- Air flow: 70 CFM
- Pad Speed: 1,800 rpm
- Kawasaki 18HP FS481V Engine Propane modified
- Optional electric clutch P/N: 300141
- Total Weight: 285 lb / 129 kg



Air Filter



Operator Controls



Adjustable height handle



Manual Choke & Electric Start

Aqua Buff Series 18HP FS481V

27" P/N: 200242


The Aqua Buff Series burnishers and polishing system offer a unique solution to quickly restore a shine to floors with protective guards and other chemicals, where the combination of water and diamond pads generates far superior results to dry buffing. The Aqua Buff & Polishing system employs a direct-feed water tank and a diamond pads to rapidly generate a top level shine with no dust.

FEATURES

- Water tank with direct feed included
- Weighted deck for additional head pressure
- Lower pad speed
- Dust collection system
- Center water feed
- ProCarb™ carburetor & E-Zero™ emissions shutdown
- Exceeds EPA and CARB standards
- Engine kill switch
- Centrifugal clutch
- Steel propane tank included

TECH SPECS

- Production: 6000 -7500 ft² / 230 m² per hour
- Engine Speed: 3,450 rpm
- Pad Speed: 900 rpm
- Pad Size: 21-27 inches / 0.6-0.7m
- 8 gallon water tank
- Kawasaki 18HP FS481V Engine Propane modified
- Total Weight: 285 lb / 129 kg

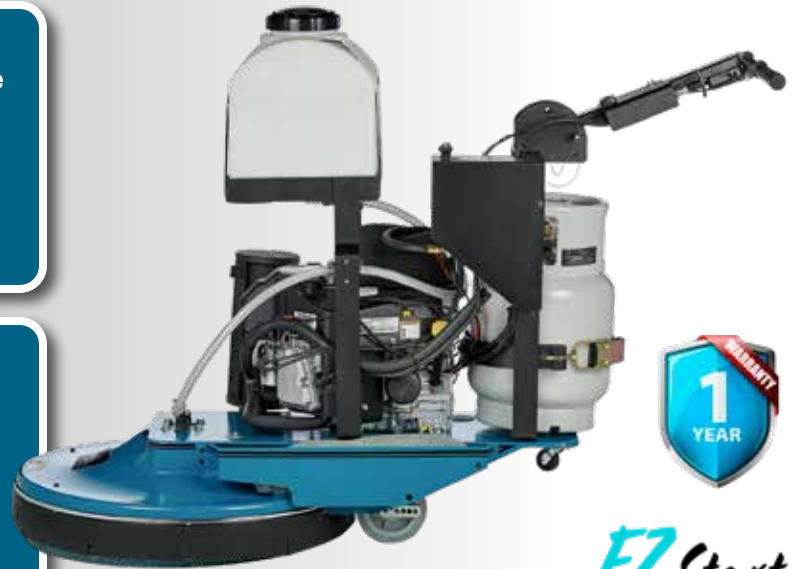

EZ Start
Hot Or Cold



Manual Choke & Electric Start



Operator Controls



Accessories



Steel Tank



Aluminum Tank

18 HP Kawasaki FS481V Engine
Propane Modified Includes
Emission System & Muffler



27 HP Propane FX80V Engine
Propane Modified Includes
Emission system & Muffler



TECH SPECS FOR PROPANE TANKS

- 20 lb Tank
- Overfill valve protection
- Fuel level Gauge
- Pressure Relief Valve
- U.S. DOT & Canada TC Rated

Propane Tanks – Vertical Vapor

Description	Part No.
Steel Propane Tank 20 lb	1705
Aluminum Propane Tank 20 lb	680053

Replacement Propane Engines

Description	Part No.
Kawasaki FS481V 18 HP	300290
Kawasaki FX850 27HP w/o Clutch	700295

Optional Burnisher Accessories

Description	Part No.
Burnisher Electric clutch all models	300141
Standard Cone Pad Driver – 21"	300143
Standard Cone Pad Driver – 27"	300145
Weighted Flat Pad Driver – 27"	300196

Optional Floor Stripper Accessories

Description	Part No.
Tracker 3000, Pride 2100 Solution tank kit	300217

Kentucky Cleaning Solutions, LLC, DBA

BLUEGRASS 


JAN/SAN & PAPER SUPPLIES

624 Comanche Trail, Frankfort, KY 40601
www.BluegrassJanitorial.com
502-382-8320

Burnisher Pads and Chemicals

Burnisher Pads

DITEQ offers many different types of pads for Burnisher/Buffers in addition to these common pads.

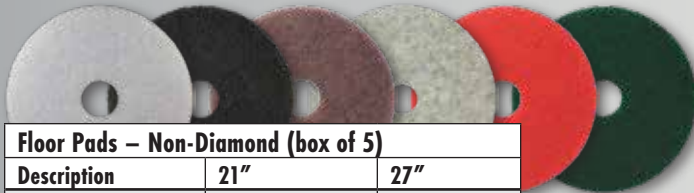

Floor Pads – Non-Diamond (box of 5)		
Description	21"	27"
White (Soft)	A70016B	A70018B
Black (Strip)	A70015B/51B	300209B
Hogs Hair (Burnish)	A70045B	A70047B
Combo (Burnish)	300189B	300191B
Red (Buff)	A70036B	A70037B
Green (Scrub)	A70038B	



Diamond Impregnated Pads for Maintenance (DIP-M)

DIP-M for maintenance pads on already polished concrete and stone


DIP-M (Sold Individually)		
Description	21"	27"
400 Grit		161283
800 Grit	161258	161259
1500 Grit	161266	161267
3000 Grit	161274	161275



DIP-M Twister Floor Pads (box of 2)

4 Step System – cleaning and polishing

DIP-M Twister Floor Pads (box of 2)		
Description	21"	27"
400 Grit Red	200630	200632
800 Grit White	200633	200635
1500 Grit Yellow	200636	200638
3000 Grit Green	200639	200641

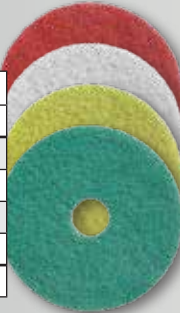

DIP-R

Diamond Impregnated Pads for Restoration to polish concrete. More aggressive than DIP-M.

DIP-R (sold individually)		
Description	21"	27"
200 Grit		161888
400 Grit	161297	161299
800 Grit	161305	161307
1500 Grit	161313	161315
3000 Grit	161321	161323
Buff	161329	161331



Densifiers

DITEQ offers both Sodium and Lithium Densifiers.

Sodium Densifier	
Description	Part No.
5 gallon RTU	690152
55 gallon RTU	300239
RTU is Ready to Use.	

Lithium Densifier	
Description	Part No.
5 gallon RTU	163429
1 gallon – Concentrate	163430
Lithium Concentrate – dilute 1:4 with water RTU is Ready to Use.	

Impregnators and Guards

The Guards and Impregnators perform the same basic function of adding a level of stain protection on polished concrete and stone surfaces from water or oil based spills. The Impregnators are synergistic and the Guard is semi-topical.

Water Based Impregnators – Low VOC, use on porous stone or polished concrete for matte gloss (400 to 800 Grit)

Solvent Based Impregnators – Dense Stone, heavy exposed aggregate, or polished concrete >1500 Grit.

Guard Sealer will increase gloss surface levels.

Impregnators	
Description	Part No.
1 gallon water based	163446
1 gallon solvent based	163447

Guard Sealer	
Description	Part No.
1 gallon Guard Sealer	163448

Sprayer and Pump Cans

Sprayers and Pump Cans	
Description	Part No.
Water Tank Standard	151055
Sprayer Pump-up for Cure-N-Seal	151470
Sprayer – Acetone	160945
Sprayer – Acid	160946



151055

TG-30 18HP FS481V

30" P/N: G00118

The TG-30 machine offers a mid-range grinding and polishing solution for light to medium duty floor preparation and finishing. The TG-30 utilizes MD Gearbox and medium-weight design to achieve rapid productivity on all surfaces. The TG-30 has a fixed head and can be used wet or dry. This machine with DITEQ ProCarb™ carburetor exceeds EPA and CARB standards.

FEATURES

- TEQ-Lok Fixed Head Design
- ProCarb™ carburetor
- LD Drive System exceeds EPA & CARB
- Manual Choke & Electric start
- Wet or dry operation
- Centrifugal clutch
- Tachometer & Hour meter
- Steel propane tank included

TECH SPECS

- Production: 800-900 ft² / 75-85 m² per hour
- Water tank: 11 gal / 42 L
- Drum speed: 1,040 rpm
- Head speed: 520 rpm counterclockwise
- Head pressure: 350 lb / 159 kg
- Grinding width: 30" / 0.76 m
- Vacuum Ports: 1
- Kawasaki 18HP FS481V Engine Propane modified
- Total Weight: 650 lb / 294.8 kg



3 or 4 slot TEQ-Lok Toolplate



Manual Choke & Electric Start



TG-18 18HP FS481V

18" P/N: G00116

Includes a true multi-accessory tooling plate for a large range of different tooling options to customize the machine (cup wheels and Velcro pad drivers, quick change TEQ-lok and two different bolt on patterns including the industry standard 3 hole traps).

Longer wheelbase to maximize the head weight, geared down for lower rpm with increased torque and longer arc swing and operator leverage for very aggressive grinding action.

FEATURES

- Uses TEQ-Lok segments or cup wheels
- Central water feed
- Adjustable handles also fold down for easy transport
- Right hand rotation
- Vacuum port
- Centrifugal clutch
- Tachometer & Hour meter
- Steel propane tank included

TECH SPECS

- 4-6 hours runtime per tank
- Kawasaki 18HP FS481V Engine Propane modified
- Disk Speed: 1,400 rpm
- Total Weight: 360 lb / 163 kg



EZ Start
Hot Or Cold



Low Profile Edger 18HP FS481V

19" P/N: 300604

The Low Profile Edger offers a solution to rapidly grind and polish edges and seamlessly feather those edges into the main floor area. The Low Profile Edger cuts within 1/4-inch of walls and obstacles, and its 3 1/2-inch height enables the operator to grind under counters and overhangs. This machine greatly reduces the time and labor required to finish edges and achieves the same quality and specification with the main floor area. The edger has adjustable head pressure with three 20 lb weights. Vacuum port for use with industrial dust vacuum. The wheels are adjustable and the propane tank is steel. The machine can use 6 metals or resins on Frankfurt plates

FEATURES

- Comes with three 20 lb weights for adjustable head pressure
- Adjustable wheels
- Water Tank Capacity 11 Gal
- Right hand rotation
- 6 metals or resins
- Manual Choke & Electric start
- Tachometer & Hour meter
- Centrifugal clutch
- Steel propane tank included

TECH SPECS

- Production: 450-550 Lineal ft/hr per cut
- Engine Speed: 3,600 rpm
- Grinding Width: 19 in / 0.49 m
- Head Pressure: 165 lb / 227 kg
- Head Speed: 640 rpm
- Vacuum Ports: 1
- Kawasaki 18HP FS481V Engine Propane modified
- Total Weight: 770 lb / 349 kg



20 lb weights for adjustable head pressure

EZ Start
Hot Or Cold



Manual Choke & Electric Start

G&P III 27HP FX850V

Floating Head 30" P/N: 300603



The G&P III grinder and polisher accommodates uneven floor surfaces with its unique floating head design. The G&P III combines flexibility with maximum power and productivity to achieve a superior polish across all floor surfaces. The G&P III utilizes the HD Gearbox for maximum torque and durability. The DITEQ ProCarb™ carburetor exceeds EPA and CARB requirements for indoor use.

FEATURES

- Wet/Dry use with 3" vacuum port
- Eagle ProCarb™ carburetor
- Manual choke & electric start
- Tachometer & Hour meter
- Standard centrifugal clutch
- Steel propane tank included

TECH SPECS

- Production: 800-1300 ft² per hour
- 30" grinding width / bolt-on or magnetic tooling
- Drum Speed: 560 rpm (counterclockwise)
- Exceeds EPA & CARB standards
- Kawasaki FX850V 27HP engine
- Total Weight: 1,300 lb / 590 kg



27 HP Propane
FX80V



Planetary Grinder/Polishers



Stone Extreme

74" P/N: 300135

The Stone Extreme provides ultimate productivity for grinding and polishing concrete, stone, and terrazzo in large, open spaces. This unit offers 8 to 10 times more productivity compared to walk-behind units, and the Stone Extreme dramatically reduces labor costs and shortens project elapsed time.

The massive Stone Extreme is ideal for large-scale jobs such as warehouses, manufacturing facilities, bridges, tennis courts, parking garages, runways, and entries to major facilities.

FEATURES

- Exceptional productivity
- Smooth, hydraulic power
- Very easy to operate
- Wet or dry operation
- Available with industrial vacuum

TECH SPECS

- Production: 8,000 ft² / 750 m² per hour double pass
- Grinding Width: 74" / 1.9 m
- Hydraulic: 35-40 gpm / 132-151 lpm
- Drum Speed: 800 rpm
- Head Power: 3 x 23 HP / 3 x 17 kW
- Head Speed: 400 rpm counterclockwise
- Head Pressure: 933 lb / 423 kg
- Vacuum Ports: 3
- Dimensions of Heads: L 192" x W 77" x H 80"
- Head Assembly Weight: 2,975 lb / 1,350 kg





Planetary Grinder/Polishers



Stone Extreme

74" P/N: 300135



Skid Steer Minimum Requirements

- Tracked
- 35-40 gpm high flow
- Creep gear
- Joy stick controls



Kentucky Cleaning Solutions, LLC, DBA
BLUEGRASS
JAN/SAN & PAPER SUPPLIES

624 Comanche Trail, Frankfort, KY 40601
 www.BluegrassJanitorial.com
 502-382-8320